



















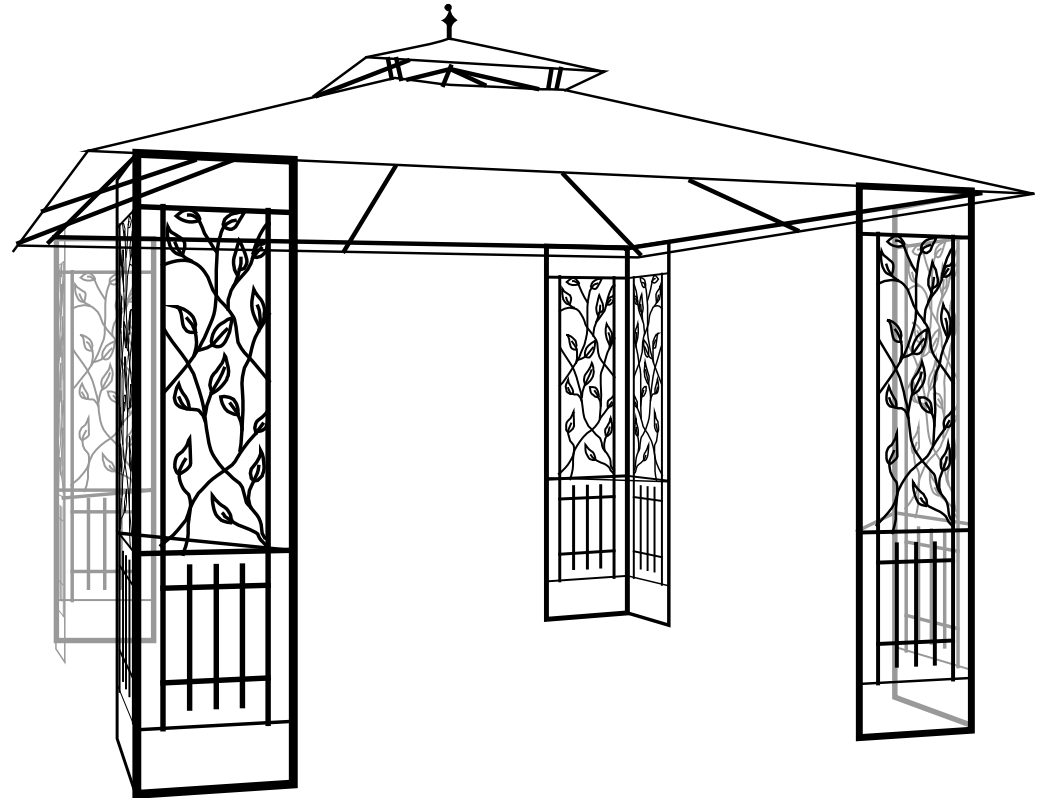
Gazebo Assembly Instruction – G-GZ077PST



Tools needed for assembly: Wrench (included)

Part List

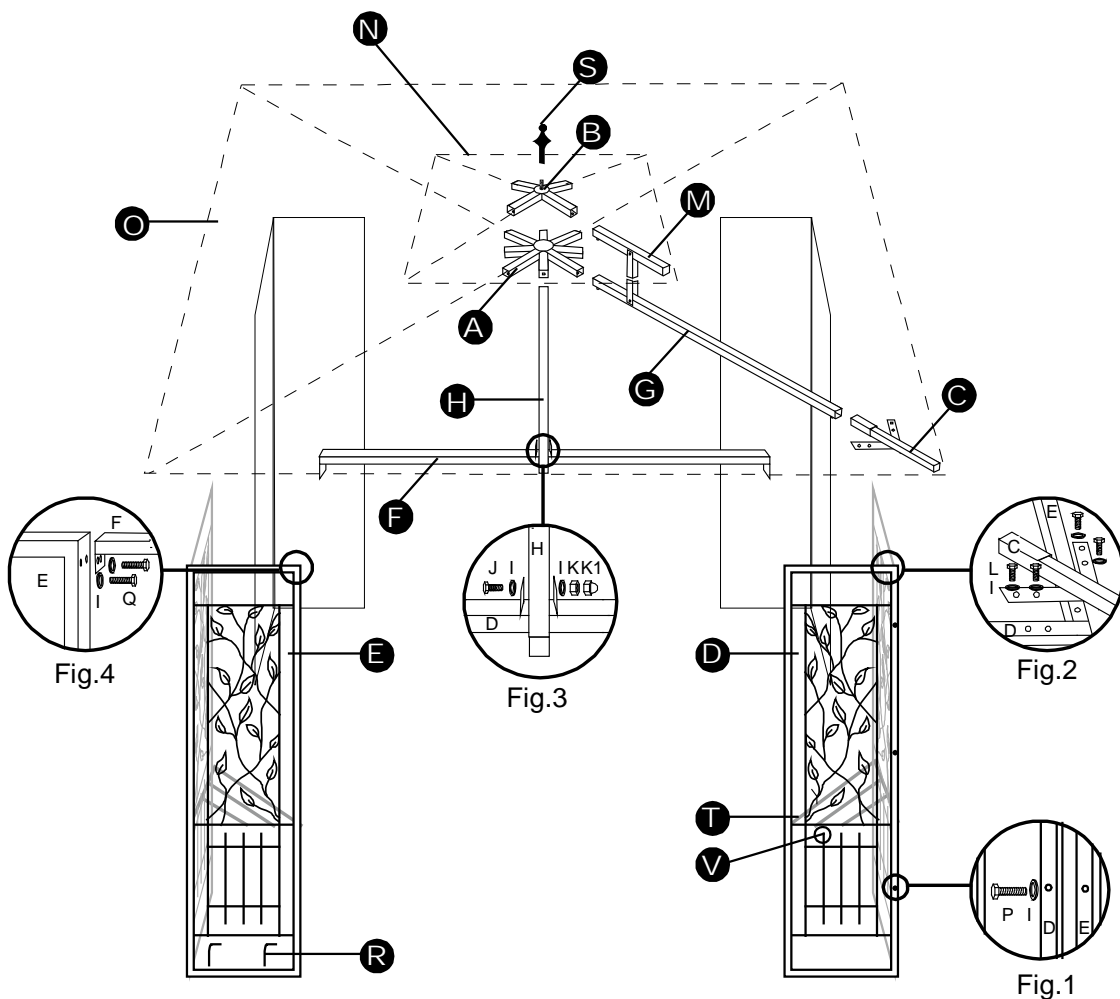
No.	Part	Image	Qty
A	Center fitting		1
B	Top center fitting		1
C	Corner fitting		4
D	Wide screen		4
E	Narrow screen		4
F	Lintel		4
G	Knighthead		4
H	Middle knighthead		4
I	Washer		52
J	Bolt M6x30		4
K	Nut M6		4
K1	Plastic cap		4
L	Bolt M5x16		16
M	Connecting pole		4
N	Top small canopy		1
O	Big canopy		1
P	Bolt M6x35		12
Q	Bolt M6x16		16
R	Stake		16
S	Top arrow		1
T	Bracket		4
U	Snap link (pre-assembled)		20
V	Plastic cap (pre-assembled)		24
W	Wrench		1



Assembly Instructions

Step 1 Check all parts and hardware listed on the parts list. Lay them on a clear and level surface prior to assembly. Ideally, the gazebo frame should be set up in its desired location to avoid moving it after assembly.

Step 2 Attach Wide screen (D) to Narrow screen (E) and fasten using Bolt M6x35 (P) and Washer (I) <Fig. 1> to shape "L". Repeat this procedure for other screens.



Step 3 Attach Corner connector (C) to the assembled "L" screens and fasten using Bolt M5x16 (L) and Washer (I) <Fig. 2>. Repeat this step for other 3 Corner connector (C).

Step 4 Attach Lintel (F) to assembled screens fasten using Bolt M6x16 (Q) and Washer (I) <Fig. 4>, repeat this step till all Lintel attached and form one 10'x10' square frame.

Step 5 Insert Knighthead (G) to the long branch of the Center fitting (A) and insert the middle knighthead (H) to the short branch of the Center fitting (A) one by one. Then attach bottom of knightheads (G) by snapping onto corner fittings (C) and the middle knightheads (H) on to struts on center of lintels (F) using Washer (I), Bolt M6x30 (J) and Nut M6 (K) and Plastic cap (K1) <Fig. 3>. Place the Big Canopy (O) on the roof frame.

Step 6 Attach the Connecting pole (M) to the Top center fitting (B) separately. Place the Top small canopy (N) onto the small top assembly thru Bolt pre-assembled on the center of the Top center fitting (B). Then insert the "T" bar on the Connecting pole (M) to the "T" bar on the Knighthead (G), to make sure the snap link are locked in securely, and fix Top arrow (S) on the bolt.

Step 7 Expand the Big canopy (O) and be securing it on to the end of the Corner fitting (C).

Step 8 Put 4 pc of Bracket (T) onto the corner of the screens.

Step 9 Tighten all hardware

Step 10 Secure the gazebo to the ground with Stakes (R).

WARNING:

- Keep all flame and heat sources away from this gazebo fabric. This gazebo is made with fabric that meets CPAI-84 specifications for flame resistance. It is not fire proof. The fabric will burn with continuous contact with any flame source.
- Children and pets should be supervised when they are in the area of gazebo construction.
- This unit is heavy. Do not assemble this item alone.
- This gazebo cannot be staked on concrete floor or platform. Check your local codes for proper mounting onto concrete slab

IMPORTANT:

MANUFACTURER'S LIMITED WARRANTY: This product is warranted for a period of six (6) months against manufacturer defects. This warranty is limited to repair or replacement of the product as deemed necessary by the manufacturer or its agents. No ancillary damages resulting from such defects are covered by this warranty.

Maintenance

Our iron components for garden accessories and furniture are coated with rust inhibiting paint that protects it from rusting. However, due to the nature of iron, surface oxidation (rusting) will occur once these protective coatings are scratched. This is a natural process and is not a defect! To minimize this condition, we recommend care when assembling & handling the product to prevent scratching the paint. Should any scratching or damage occur, we recommend immediate touch-up with rust inhibiting paint, which is included in the package. Surface rust can also be easily removed with a very light application of common cooking oil. If surface oxidation (rusting) occurs and if no measure is taken to prevent this, the oxidation may start dripping on to deck or patio and cause damaging stains, which may be difficult to remove. This can be prevented if measure is taken to keep the product from oxidizing.